CHOPPER BUILDERS HANDBOOK

© 2001-06 G.W. WEISHAUPT, ALL RIGHTS RESERVED.

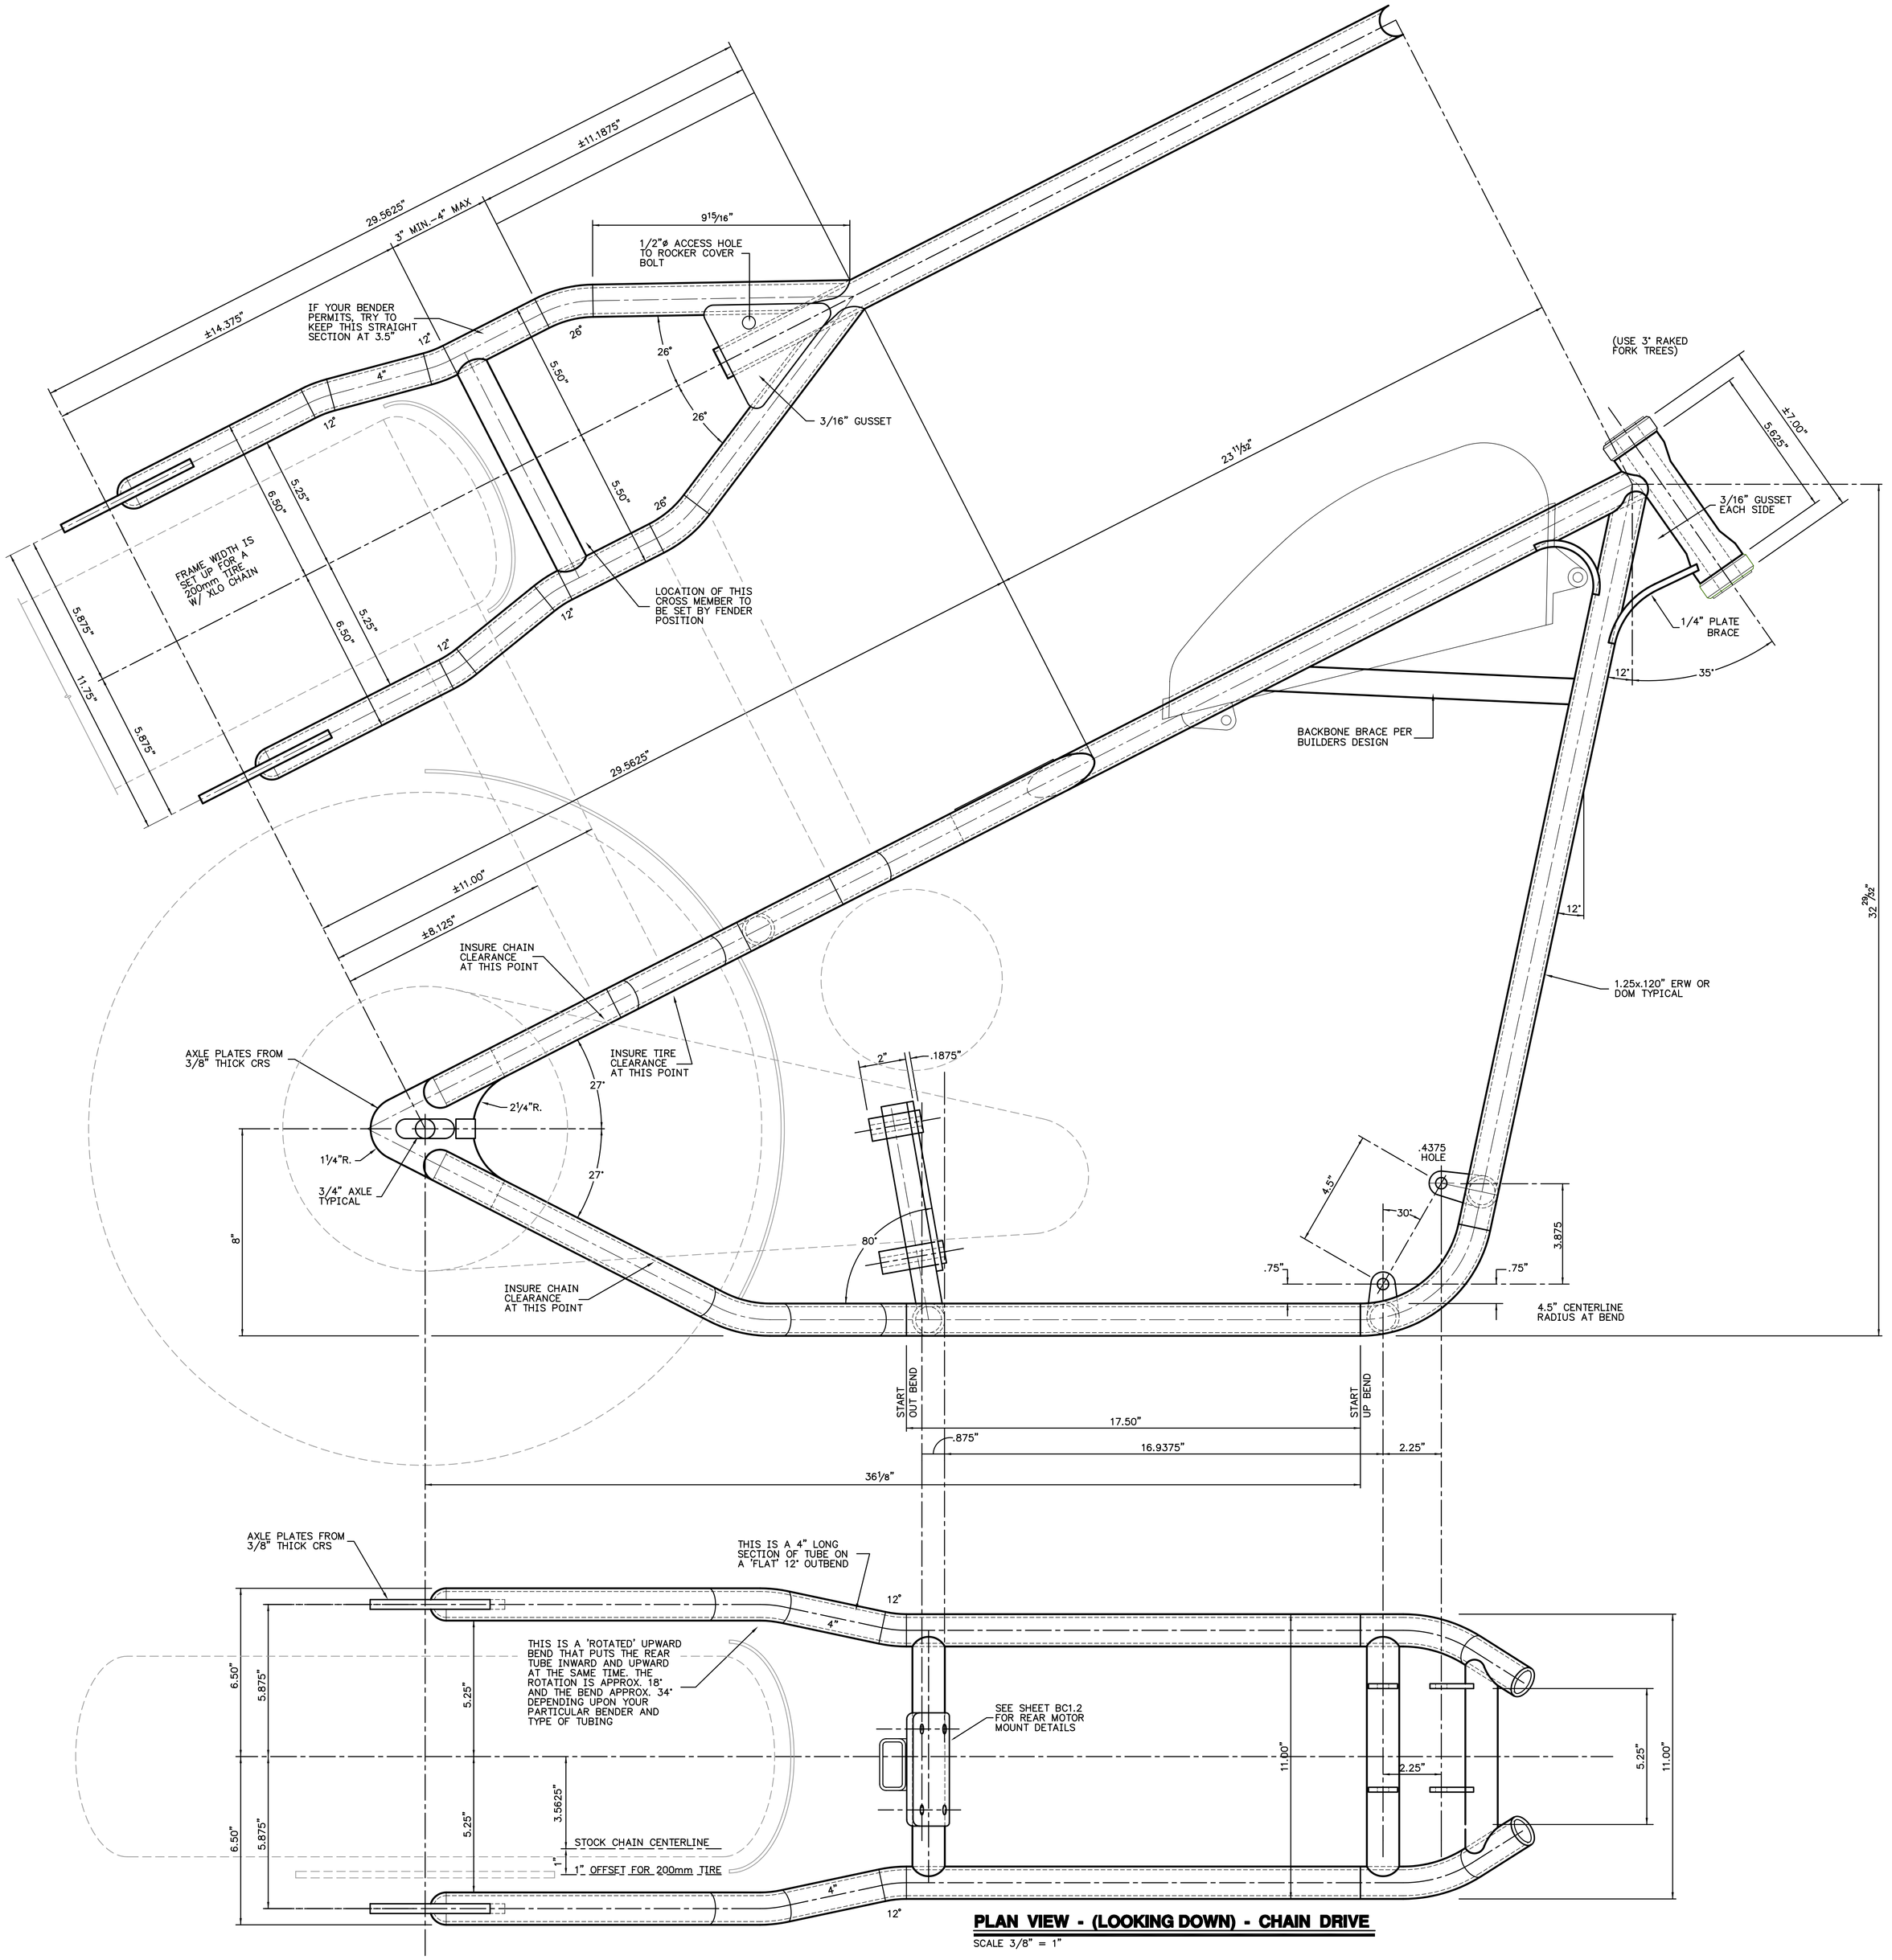

PLAN VIEW - (LOOKING DOWN) - CHAIN DRIVE

SCALE 3/8" = 1"

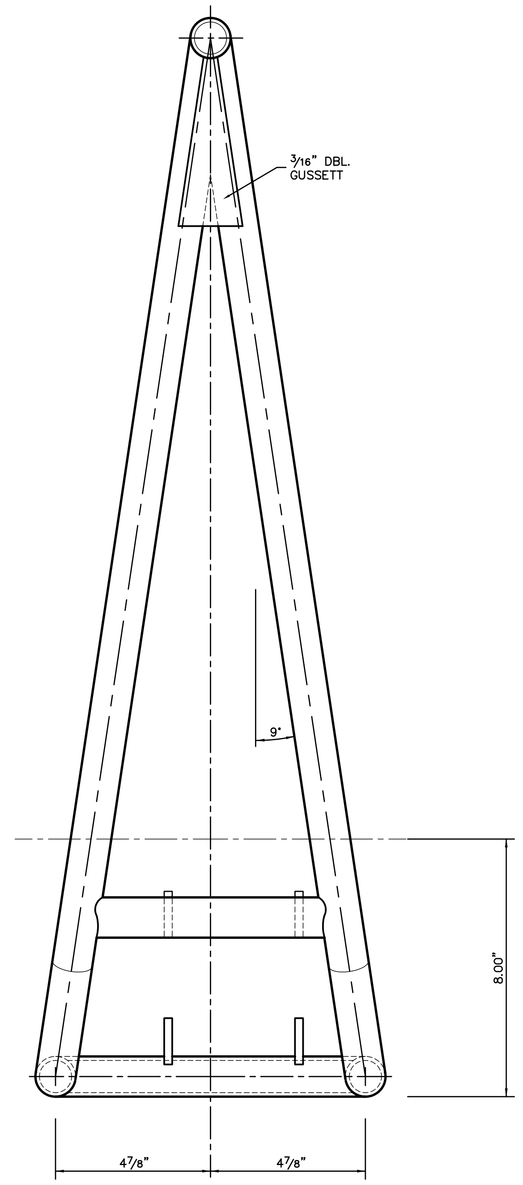

FRONT VIEW (LOOKING TOWARDS REAR)

SCALE 3/8" = 1"

GENERAL NOTES

1. THIS SERIES OF DRAWINGS HAS BEEN DEVELOPED FOR THE SOLE PURPOSE OF SERVING AS REFERENCE MATERIALS DURING THE CONSTRUCTION OF CUSTOM MOTORCYCLE FRAMES. DO NOT USE THESE DRAWINGS DURING THE RESTORATION OR REBUILDING OF A STOCK FRAME.
2. THE FRAMES SHOWN HEREIN ARE INTENDED FOR USE WITH STOCK H.P. ENGINES AND NOT HIGH PERFORMANCE MOTORS. CONSULT THE DESIGNER FOR HIGH PERFORMANCE MODIFICATIONS.
3. FRAMES AND/OR COMPONENTS DEPICTED HEREIN ARE INTENDED TO BE CONSTRUCTED BY SKILLED PROFESSIONAL WELDERS AND FABRICATORS FAMILIAR WITH MOTORCYCLE CONSTRUCTION TECHNIQUES. THE DESIGNER WILL NOT BE RESPONSIBLE FOR DAMAGES THAT RESULT FROM IMPROPER APPLICATION AND INTERPRETATION OF THESE DRAWINGS OR SUB-STANDARD WORKMANSHIP.
4. NOTE THAT UNLESS SPECIFIED OTHERWIDE ALL TUBING BENDS ARE BASED UPON A 4.5" CENTERLINE RADIUS, USING 1.25" O.D. TUBING.
5. THE MINIMUM TUBING SPECIFICATION IS TO BE 1.25" O.D.x .120" WALL COLD ROLLED ELECTRIC RESISTANCE WELDED MECHANICAL TUBING (CREW), GRADE 1020 OR EQUIV. DOM TUBING.

   BACKBONE AND MOTOR MOUNT CROSS MEMBERS SHALL BE MINIMUM .188" WALL THICKNESS.

GARY W. WEISHAUPT

PERFORMANCE ENGINEERING
CHASSIS FABRICATION
FLOWBENCH TESTING
MACHINE WORK
RESTORATIONS

1490 RIVER PARK BLVD.
NAPA, CALIFORNIA 94559
Ph. 707-252-3427
Fax 707-252-3427
email: gww25@pacbell.net

Revision	Date
* INITIAL LAYOUT	6-12-02
* REVISION	3-8-05
*	
*	
*	
*	
*	
*	

PRELIMINARY

Project Title

PROTOTYPE RIGID EVO SPORTSTER CHOPPER FRAME

THE BOBCAT

Drawn By	GWW
Date	3-8-05
Checked By	HC
Date	4-2-05
Scale	3/8" = 1"
Plot Scale	.375:1
Project No.	BC-6-05

Sheet Description

PLAN AND PROFILE VIEWS

Sheet No.

BC 1.1